



Telephones:  
Off.(PBX) : 0184-2291119,  
: 2291519 , 2291218  
Fax : 91-184-2290480  
E-mail-directr@cssri.ren.nic.in

केन्द्रीय मृदा लवणता अनुसंधान संस्थान,  
करनाल (हरियाणा), भारत  
Central Soil Salinity Research Institute,  
Karnal- 132 001 (Haryana) INDIA

REGISTERED

No.P-2(102)K/U./11-12 16317

Dated: 24 December 2011

M/S OIC Computer Cell  
- CSSRI, Karnal

*For publication please*

Sub:- Replacement of Underground Irrigation Channel and construction of new channel (1000 m) at Farm Section, CSSRI, Karnal .

Dear Sirs,

You are hereby invited to submit the rates for the works on the above subject as per details attached and as per terms & conditions below. Quotations should be sealed. Unsealed quotations are liable to be rejected. The sealed quotations giving reference of work on the body of envelope as per guidelines in the letter of invitation must reach at this Institute on or before **14 January 2012** in the name of Sr. Admn. Officer, CSSRI, Karnal – 132 001 (Haryana)

**TERMS & CONDITIONS:**

1. Item wise absolute rates for each and every item should be quoted.
2. Rate should be quoted on the printed letter pad of the firm.
3. After completion of the work, the work site & its surroundings should be cleared and cleaned immediately.
4. Any type of official implements and help will not be provided by the Office.
5. All precautionary safety measures to be followed & risk if any to be born by the contractor. Office will not be responsible for any mis-happening if caused during the execution of work to the contractor or his workers.

6. The water charges and Electricity charges will be deducted as per norms.
7. T.D.S as per rules (prevailing at the time) will be deducted from your Bill.
8. The payment will be made on the basis of actual measurement/work done and only on bill basis after completion of works.
9. **The quotations must be accompanied with EMD for Rs. 7,100/- in the form of Bank Draft drawn in favour of ICAR-UNIT-CSSRI, Karnal. If EMD is not found attached, the quotation will not be entertained.**
10. The work must be completed within **45 days** from the date of the issue of work order. A penalty may be imposed as per GFR in case the work is not completed within stipulated time.
11. The rates for scheduled items must be quoted for all items in terms of % above, below or at par on the basis of DSR-2007 and for the Non Scheduled items local rates may be quoted for each items.
12. Director, CSSRI, Karnal has the right to reject the quotations without assigning any reason.
13. **PAN No. Name of Bank and Account No. must be written on the quotation otherwise it would be cancelled.**
14. The latest attested copies of his PAN No, Licence Contractorship must also be Attached.
15. Income Tax as per rules (prevailing at the time) will be deducted from your Bill.

  
ASSTT. ADMN. OFFICER

Encl: As above

**Sub: Estimate for Replacement of under ground Irrigation Channel and construction of new channel (3280 Rft or 1000 m)  
( Based on Local prevailing rates)**

S.No.	Description of work	Qty.	Unit	Rate	Amount
A)	Providing and laying 6 "pipe				

Excavation work by mechanical means (Hydraulic excavator)/manual means in foundation trench of required width 1' and 3' deep for laying and joining of H.D.P.E pipe 6" with pressure 3.2 Kg/sqcms including socket, bend etc complete in all respect. The pipe having thermal stability for hot & cold water supply including jointing of pipes & other fittings. The work includes jointing of pipes & fitting with cement solvent, trenching, refilling and testing of joints complete as per directions. The serviceable material to be stacked and unserviceable material to be disposed as directed within a lead of 50 m. The complete work to be tested as per actual supply system.

3280 Rft.

**B) Construction of Riser ( 7 Nos. )**


Providing and fixing of

i) Tee PVC	7 Nos.
ii) Elbow "	7 Nos.
iii) Pipe PVC 8" 3 ft. long	7 Nos.
iv) PECLAN 8" 3 ft. long	7 Nos.
v) End Cap PVC	7 Nos.
vi) Clump MS "	7 Nos.
vii) Ring rubber	7 Nos.
viii) Solution (white)	7 Ltrs.
ix) Solution (black-chipco)	7 Ltrs.
x) Bend ( declined pipe) 3 joints	7 Nos.
xi) Air valve 2" ( 2 Nos)	7 Nos.
xii) Nipple 2' ( 2 Nos)	7 Nos.

xiii) Construction of Hodhi with flooring 1m X 1 m X 0.50 m , the flooring with c.c. 1 :2:4 and surrounding brick walls 4" with cement plaster 1:4	7 Nos.
--	--------

**Total ( A+B)**

T.NO. 1

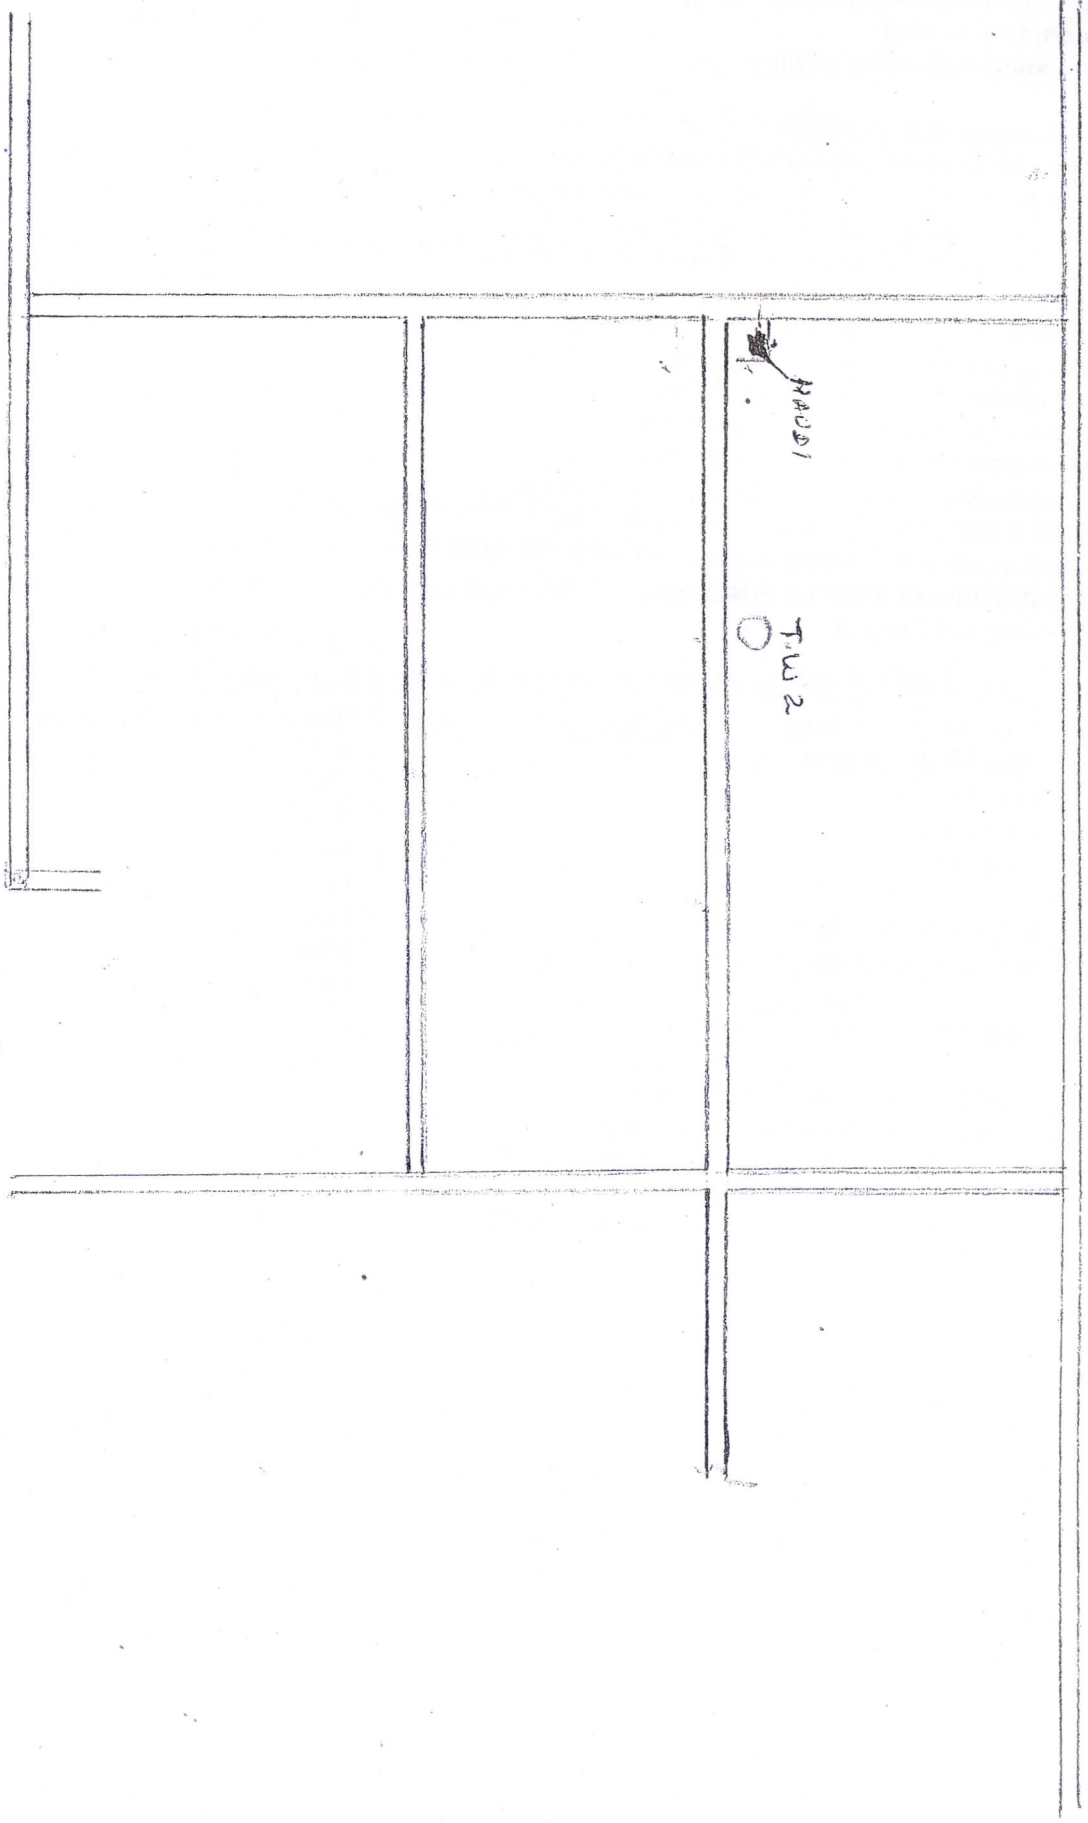

T.W. 3

Layout of Proposed Underground Irrigation Pipe Line (1990000)